# A Complete Line of Pumps for Industry

### SERIES 600 MODEL 629 & 636 Industrial Vertical Process Pump



- Capacities to 3000 GPM
- Heads to 230 Feet
- Temperature to 180° F
- Column Extensions of 12", 15" & 21"
- Construction: Cast Iron,
   316 Stainless Steel Fitted,
   316 Stainless Steel, Alloy 20

#### SERIES 700 MODEL 720 & 724 Vertical Non-Clog Sewage Ejector



- Capacities to 1500 GPM
- Heads to 100 Feet
- Pit Depths to 26 Feet
- Construction: Cast Iron

### SERIES 800 MODEL 814, 820, 824 & 832 Industrial Vertical Immersion Sump Pump



- Capacities to 3000 GPM
- Heads to 230 Feet
- Temperature to 350° F
- Pit Depths to 26 Feet
- Construction:

Cast Iron, 316 Stainless Steel Fitted, All 316 Stainless Steel, Alloy 20, Hastelloy, CD4MC

# A Complete Line of Pumps for Industry

SERIES 900 MODEL 920, 924 & 932 Industrial Vertical Immersion Vortex Sump Pump



- Capacities to 1600 GPM
- Heads to 170 Feet
- Temperature to 350°F
- Pit Depths to 26 Feet
- Solid Handling up to 4" Diameter Shperes
- Construction:

   Cast Iron,
   316 Stainless Steel Fitted,
   All 316 Stainless Steel,
   Alloy 20,
   CD4MC,
   CD4MC,
   Construction:
   Construction:
   Construction:
   Construction:
   Construction:
   Construction:
   All Stainless Steel
   All Stainless Steel
   Construction:
   Construction:

SERIES 1100 MODEL 1101, 1102 & 1103 Industrial Vertical Cantilever Vortex Pump



- Capacities to 1600 GPM
- Heads to 170 Feet
- Temperature to 400°F
- Pump Length to 6 Feet
- Shaft Diameter to 5"
- Solid Handling up to 4" Diameter Shperes
- Construction:

   Cast Iron,
   316 Stainless Steel,
   Alloy 20,
   Hastelloy,
   CD4MC,

SERIES 1200 MODEL 1201, 1202 & 1203 Industrial Vertical Cantilever Centrifugal Pump



- Capacities to 3000 GPM
- Heads to 230 Feet
- Temperatures to 400°F
- Pump Length to 6 Feet
- Shaft Diameter to 5"
- Construction:

   Cast Iron,
   316 Stainless Steel,
   Alloy 20,
   Hastelloy,
   CD4MC,

## **Industrial Horizontal End Suction Pumps**

#### **MODEL 1312** Close-Coupled

- Capacities to 240 GPM
- Heads to 160 Feet
- 1750 and 3500 RPM
- Back Pull-Out Construction
- Mechanical Seal
- Semi-Open Impeller
- Construction: All Iron, Bronze Fitted, 316 Stainless Steel Fitted, All 316 Stainless Steel



### **SERIES 1300** MODEL 1320, 1326 & 1334

Close-Coupled

- Capacities to 3600 GPM
- Heads to 275 Feet
- Temperature to 250° F
- Back Pull-Out Construction
- Semi-Open Impeller
- Packing or Mechanical Seal
- Construction: Cast Iron, 316 Stainless Steel Fitted. All 316 Stainless Steel, Alloy 20, CD4MC<sub>...</sub>



Series 1300


#### MODEL 1400LF

Base-Mounted.

Low Flow Pump

#### Also available as vertical wet pit pump

- Capacities to 50 GPM
- Heads to 345 Feet
- Temperature to 250° F
- Back Pull-Out Construction
- Radial Vane Impeller
- External Impeller Adjustment
- Packing or Mechanical Seal
- Construction: Ductile Iron, Bronze Fitted, 316 Stainless Steel Fitted, All 316 Stainless Steel

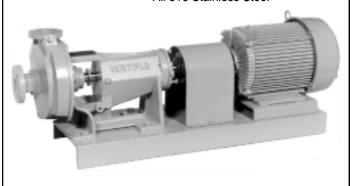

### **SERIES 1400** MODEL 1420, 1424

& 1434 Base-Mounted

- Capacities to 3600 GPM
- Heads to 275 Feet
- Temperature to 250° F
- Back Pull-Out Construction
- Semi-Open Impeller
- Packing or Mechanical Seal
- Construction: Cast Iron, Stainless Steel Fitted, All 316 Stainless Steel. CD4MC,



Series 1400

## **Industrial Horizontal End Suction Pumps**

### **SERIES 1500** MODEL 1520, 1524 & 1534

Base-Mounted Vortex

- Capacities to 1600 GPM
- Heads to 170 Feet
- Temperature to 250° F
- Back Pull-Out Construction
- Fully Recessed Vortex Impeller
- External Impeller Adjustment
- Packing or Mechanical Seal
- Construction: Cast Iron, Alloy 20 316 Stainless Steel Fitted, All 316 Stainless Steel, CD4MC,



Series 1500

#### **SERIES 1600** MODEL 1620, 1626 & 1634

Close-Coupled Vortex

- Capacities to 1600 GPM
- Heads to 170 Feet
- Temperature to 250° F
- Back Pull-Out Construction
- Fully Recessed Vortex Impeller
- External Impeller Adjustment
- Packing or Mechanical Seal
- · Construction: Cast Iron, 316 Stainless Steel Fitted, Alloy 20, All 316 Stainless Steel, CD4MC...



Series 1600

#### **SERIES 2100**

Trash- and Solids-Handling Self-Priming Centrifugal Pump

- Capacities to 1300 GPM
- Heads to 112 Feet TDH
- Sizes: 3", 4" and 6"
- Solids Handling: Up to 3" Diameter Sphere
- Suction Lifts to 25 Feet
- Construction: Cast Iron, All 316 S.S., All CD4MC,, 316 S.S. Fitted, CD4MC Fitted

